

LINK H 330 TC

compact Hot Foil Stamping Machine with turnable foil feeding head



Link H 330 TC Hot Foil Stamping Machine

independent stand-alone-machine for labels on roll refining with hot foil stamping or - as an option - hot foil stamping and embossing in one run. For efficient use the foil feeding unit can be easily turned and positioned appropriate to the job lengthwise or crosswise to the web. The web width 330 mm is determined to match digital printing systems.



Features

- ▶ unwind with air shaft
pneumatic brake for tension control
- ▶ Stand-Alone-Module with infeed and outfeed system
second pass scanner
web tension control setting
servo drive
- ▶ flat bed hot foil stamping unit with electric heating system
turnable foil feeding head
two path foil feeding
foil saver system
7" touch screen mounted on movable arm
- ▶ rewind with air shaft

Options


- ▶ remote support
- ▶ digital pressure control system
- ▶ hologramm register control system
- ▶ embossing chassis
- ▶ foil unwind friction shafts



Grafische Systeme Volker Schischke Handelsgesellschaft mbH
Administration & Service: Nikolaus-Otto-Straße 8 • D-40670 Meerbusch
Telefon +49 (0) 2159 - 696490 • info@grafische-systeme.com
Sales: Falkenhäger Weg 34 a • D-17192 Waren
Telefon +49 (0) 3991 - 165850 • h.grundmann@grafische-systeme.com
www.grafische-systeme.com

LINK H 330 TC

compact Hot Foil Stamping Machine with turnable foil feeding head

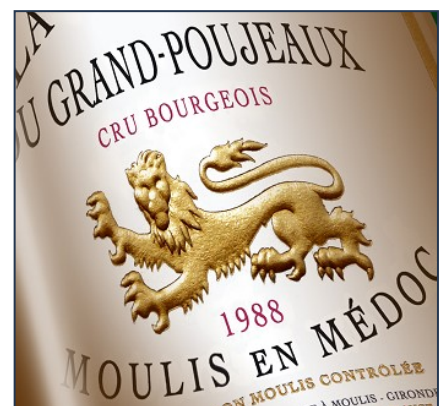

Technical Data

web width	330 mm
roll diameter unwind	700 mm
roll diameter rewind	700 mm
core diameter	76 mm
working area	320 x 300 mm
foil width max.	longitudinal feeding 330 mm cross feeding 210 mm
roll diameter foil	300 mm
core diameter foil	76 mm
speed max.	200 imp./min, dependent from size, material and design

